

ACNC/TOTALPLEX®

DOORBELL FON™

DP-28CI

TODAYS GENREATION DOOR

BELL

DESCRIPTION

This Inbound Relay Trigger Controller provides 800ms of dry contact closure. This unit is simply bridged to the door box leads. It is activated by the push button on the door box. Use this product for a door chime, to activate a camera, or turn on a light.


FEATURES

- ❑ Powered by internal NiCad battery
- ❑ May also be powered by an external 3v power source
- ❑ Simplistic installation
- ❑ Will handle the following current
 - 1.0 amp at 30vdc
 - 0.5 amp at 125vdc
 - 0.3 amp at 60vdc

APPLICATIONS

- ❑ Doorbells & chimes
- ❑ Camera, camera switchers
- ❑ Exterior lights
- ❑ Strobe lights (hearing impaired)
- ❑ Any electrical/automation device

MOUNTING

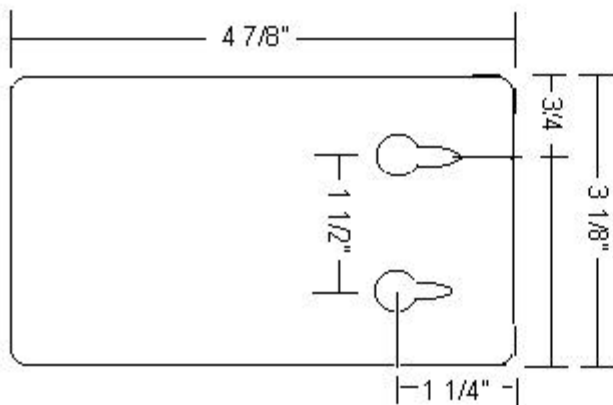

HOOK UP

