

Honeywell Total Connect[®] 2.0 Remote Services Integration with Honeywell Wi-Fi[®] and RedLINK[™] Thermostats

Integration Notes

- Integration requires Total Connect 2.0 iOS app version 3.10.5+
 - Currently supported ONLY on the iOS app. Thermostat integration is not available on Android[™] app or TC2 web portal.
 - Limited to status and control only. Notification and Scenes not currently supported.
- Automation must be enabled on the Honeywell Total Connect 2.0 account
- TC2 Integration supports Honeywell Wi-Fi or RedLINK thermostats supported by Total Connect Comfort, please visit: https://forwardthinking.honeywell.com/related_links/thermostats/03-00005.pdf
- TC2 can support up to 20 Wi-Fi/RedLINK thermostats (in addition to any Z-Wave[®] thermostats for a possible total of 40 thermostats)


Integration Steps

1. Install thermostat and configure network connection
2. Go to Total Connect Comfort (TCC) website @ <https://mytotalconnectcomfort.com/portal/>
 - a. Create and validate a TCC account
 - b. Register thermostat by submitting the MAC and CRC when required
3. Complete the integration via TC2 iOS app version 3.10.5+ (see screenshots on page 2)
 - a. Login to the TC2 iOS app and go to the Automations module for the intended TC2 location (NOTE: Automation must be enabled on the TC2 account)
 - b. Click on the hamburger menu button at the top right of the screen
 - c. Find and select the option to “Add/Remove TCC Thermostat”
 - d. Input the TCC login credentials and click the Login button
 - e. Select the desired Thermostat(s) from the list (ensure a check mark appears next to the selected thermostat) and click the Save button
 - f. You should get a message indicating the thermostat(s) have been added to the location
 - g. Integration is complete and the user should see and have control of the thermostat in the Total Connect 2.0 iOS app


Honeywell Total Connect® 2.0 Remote Services Integration with Honeywell Wi-Fi and RedLINK Thermostats

Screenshots for Integration Steps in TC2 app


Login to the TC2 iOS app and go to the **Automations** module

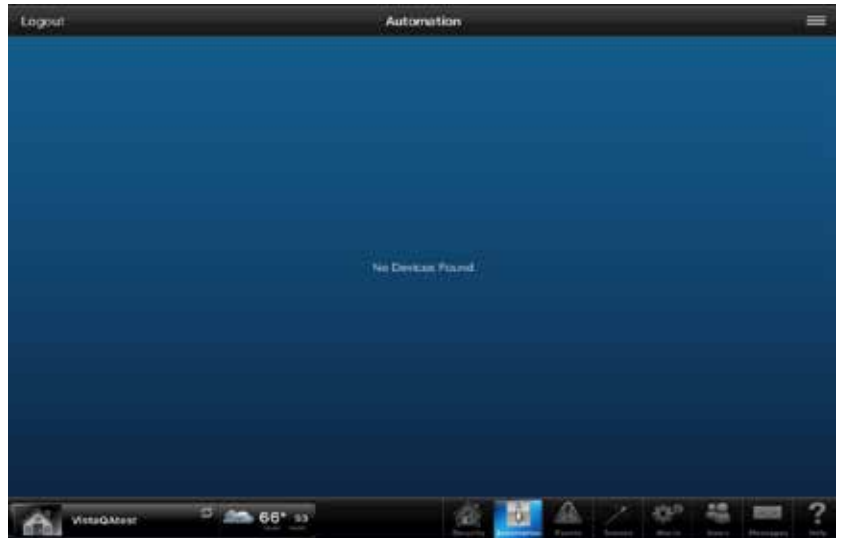

Click on the hamburger menu button and select **“Add/Remove TCC Thermostat”**.

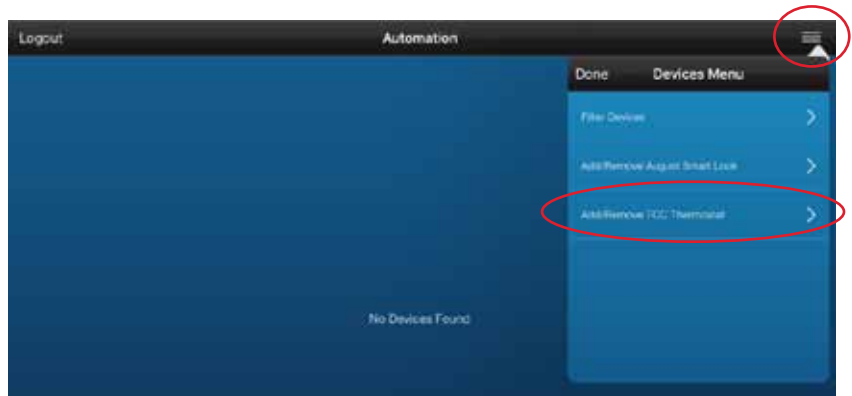


Input TCC login credentials and click the **Login** button

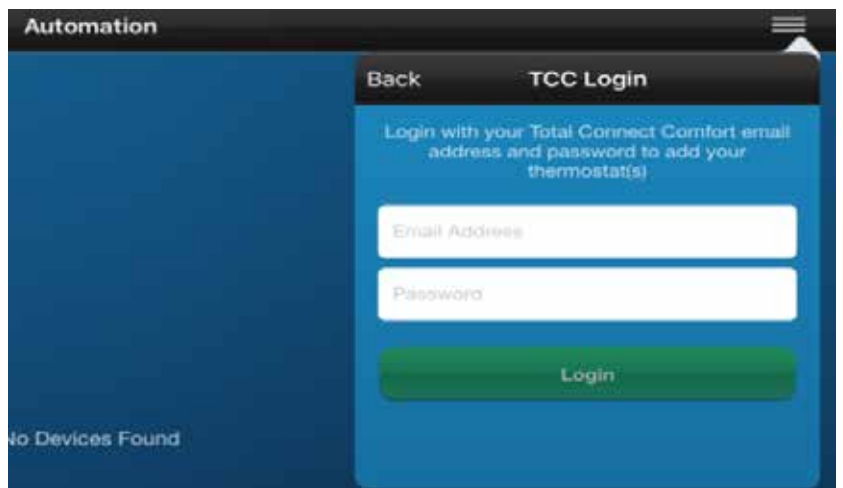


Honeywell Total Connect® 2.0 Remote Services Integration with Honeywell Wi-Fi and RedLINK Thermostats

Select desired thermostat(s) and click **Save**

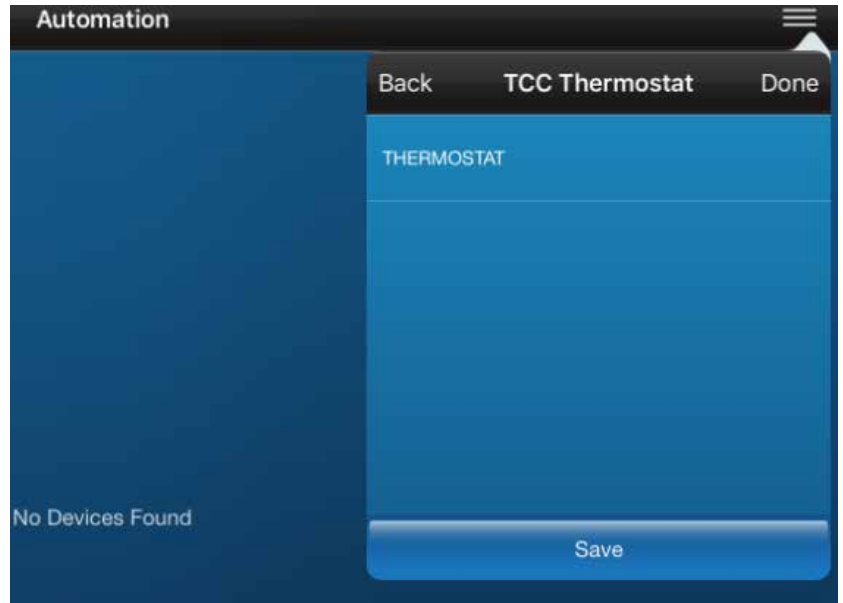

TCC thermostat has been integrated into the TC2 app

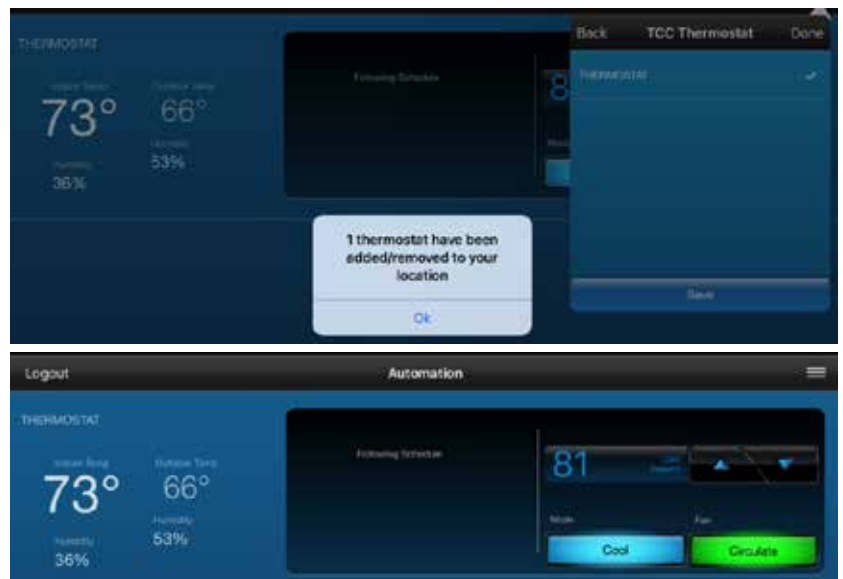

For more information

www.honeywell.com/security

Honeywell Security and Fire

2 Corporate Center Dr. Suite 100

P.O. Box 9040

Melville, NY 11747

www.honeywell.com

L/TC2WFTIF/D | 06/16
© 2016 Honeywell International Inc.

Honeywell